


DALI Module with Momentary Switch

09.240GC.04318



Important: Read All Instructions Prior to Installation

Function introduction

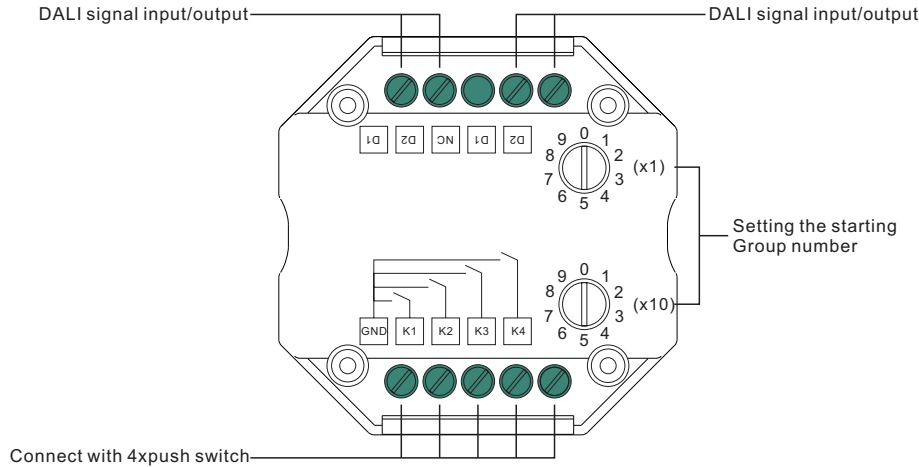

Product Data

| | |
|-----------------------|----------------------|
| Output Signal | DALI signal |
| Power Supply | Provided by DALI bus |
| Power consumption | 4 mA |
| Operating temperature | 0-40°C |
| Relative humidity | 8% to 80% |
| Dimensions | 52x52x22.9mm |

- Standard DALI Master , control 4 DALI Addresses
- Comply to DALI standard protocol IEC60929 and in compliance with DALI products from other international incorporation.
- With bus detective function, one channel DALI bus can install multiple dimming controllers.
- No external power supply which is provided by DALI bus. Consumption current is 4mA.
- Enable to select 4 different group addresses for controlling by encoding switch.
- Controlled by external switch, convenient and flexible, with small size, it can be easily placed into 86 X 86 mm box.

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

Operation

Set starting number for DALI masters

1. Set the starting number "X" on the DALI controller (with 16 groups)
2. K1 control X group, K2 control X+1 group, K3 control X+2 group, K4 control X+3 group

Wiring diagram

